



STRUCTURAL CALCULATION

Solar Panel Array	3x9 5d
Calculation Standard	ASCE7-10/AISC360
Date	2025/11/24



CONTENTS

1.Basic information and design standards.....	3
1.1 Standard code.....	3
1.2 Design condition and technical parameters.....	3
2.Load calculation.....	3
2.1 Design structural.....	3
2.1.1 Sketch of bracket.....	3
2.1.2 Structure properties.....	4
2.2 Load calculation.....	6
2.2.1 Dead load.....	6
2.2.2 Snow load	6
2.2.3 Wind load.....	6
2.2.4 Load combinaton.....	9
2.3 Strength Calculation.....	9
2.3.1 Load diagram	10
2.3.2 Structural calculation	11

1.1 Standard code

- Design Software :sap2000

- Layout



2.1.2 Structure properties

a. Mount rail



C200x100x20x3.0


Q235B

Property Data

Section Name			
C200x100x20x3.0			
Properties			
Cross-section (axial) area	1284.	Section modulus about 3 axis	84484.92
Moment of Inertia about 3 axis	8448492.	Section modulus about 2 axis	24766.552
Moment of Inertia about 2 axis	1667366.	Plastic modulus about 3 axis	96354.
Product of Inertia about 2-3	0.	Plastic modulus about 2 axis	38574.
Shear area in 2 direction	622.9556	Radius of Gyration about 3 axis	81.1151
Shear area in 3 direction	568.5124	Radius of Gyration about 2 axis	36.2512
Torsional constant	3877.1027	Shear Center Eccentricity (x3)	0.

OK

b-1. Middle welded beam

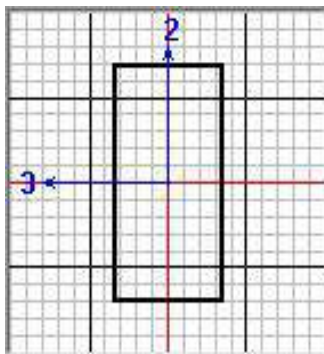

100*200*2.75


Q235B

Property Data

Section Name			
100x200x2.75tube			
Properties			
Cross-section (axial) area	1619.75	Section modulus about 3 axis	87225.46
Moment of Inertia about 3 axis	8722546.	Section modulus about 2 axis	55766.29
Moment of Inertia about 2 axis	2988314.4	Plastic modulus about 3 axis	106260.34
Product of Inertia about 2-3	0.	Plastic modulus about 2 axis	65766.59
Shear area in 2 direction	1100.	Radius of Gyration about 3 axis	73.3834
Shear area in 3 direction	550.	Radius of Gyration about 2 axis	42.9526
Torsional constant	6872118.	Shear Center Eccentricity (x3)	0.

OK

b-2. Side welded beam

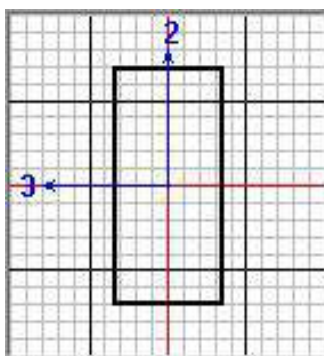

100*200*2.5


Q235B

Property Data

Section Name			
100x200x2.5tube			
Properties			
Cross-section (axial) area	1475	Section modulus about 3 axis	79655.73
Moment of Inertia about 3 axis	7965573.	Section modulus about 2 axis	54686.46
Moment of Inertia about 2 axis	2734322.9	Plastic modulus about 3 axis	96906.25
Product of Inertia about 2-3	0.	Plastic modulus about 2 axis	60031.25
Shear area in 2 direction	1000.	Radius of Gyration about 3 axis	73.4873
Shear area in 3 direction	500.	Radius of Gyration about 2 axis	43.0555
Torsional constant	6264799.	Shear Center Eccentricity (x3)	0.

OK

c-1. Middle welded pile



100*100*2.75


Q235B

Property Data

Section Name			
100x100x2.75tube			
Properties			
Cross-section (axial) area	1069.75	Section modulus about 3 axis	33751.06
Moment of Inertia about 3 axis	1687552.9	Section modulus about 2 axis	33751.06
Moment of Inertia about 2 axis	1687552.9	Plastic modulus about 3 axis	39022.84
Product of Inertia about 2-3	0.	Plastic modulus about 2 axis	39022.84
Shear area in 2 direction	550.	Radius of Gyration about 3 axis	39.718
Shear area in 3 direction	550.	Radius of Gyration about 2 axis	39.718
Torsional constant	2529306.9	Shear Center Eccentricity (x3)	0.

OK

c-2.Side welded pile

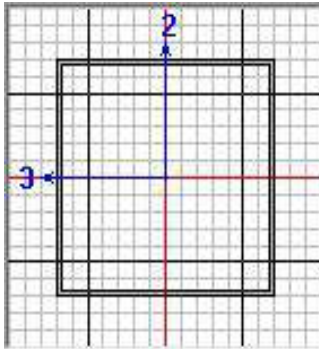

100*100*2.5

Q235B

Property Data

Section Name			
100x100x2.5Iube			
Properties:			
Cross-section (axial) area	975	Section modulus about 3 axis	30915.625
Moment of Inertia about 3 axis	1545781.3	Section modulus about 2 axis	30915.625
Moment of Inertia about 2 axis	1545781.3	Plastic modulus about 3 axis	36656.25
Product of Inertia about 2-3	0	Plastic modulus about 2 axis	36656.25
Shear area in 2 direction	500	Radius of Gyration about 3 axis	39.6173
Shear area in 3 direction	500	Radius of Gyration about 2 axis	39.6173
Torsional constant	2317146.4	Shear Center Eccentricity (x3)	0

OK

d.BIPV rail



AL6005-T5


Property Data

Section Name			
BIPV rail			
Properties:			
Cross-section (axial) area	443.1572	Section modulus about 3 axis	4374.4883
Moment of Inertia about 3 axis	106032.49	Section modulus about 2 axis	7156.4205
Moment of Inertia about 2 axis	442265	Plastic modulus about 3 axis	5842.9982
Product of Inertia about 2-3	-27104	Plastic modulus about 2 axis	11444.787
Shear area in 2 direction	278.3223	Radius of Gyration about 3 axis	15.4582
Shear area in 3 direction	240.0573	Radius of Gyration about 2 axis	31.5909
Torsional constant	394.5565	Shear Center Eccentricity (x3)	0

OK

e.Steel rod

φ10



Q235B

Property Data

Section Name			
Steel rod			
Properties:			
Cross-section (axial) area	78.5398	Section modulus about 3 axis	98.1748
Moment of Inertia about 3 axis	490.8739	Section modulus about 2 axis	98.1748
Moment of Inertia about 2 axis	490.8739	Plastic modulus about 3 axis	166.6667
Product of Inertia about 2-3	0	Plastic modulus about 2 axis	166.6667
Shear area in 2 direction	70.6858	Radius of Gyration about 3 axis	2.5
Shear area in 3 direction	70.6858	Radius of Gyration about 2 axis	2.5
Torsional constant	981.7477	Shear Center Eccentricity (x3)	0

OK

2.2 Load calculation

2.2.1 Dead load

●Solar Panel:

Dead-weight of panel $G1=20.8\text{kg} \approx 0.204 \text{ KN}$
Standard load of panel: $G1/m^2 = 0.204\text{KN}/ (1.722 \times 1.134) = 104 \text{ N/m}^2$

2.2.2 Snow load

(1) Flat Roof Snow Loads, p_f

a. Ground snow load, P_g

$P_g = 1440 \text{ N/m}^2$

b. Exposure Factor, $C_e = 0.9$

The value for C_e shall be determined from Table 7-

Table 7-2 Exposure Factor, C_e

Terrain Category	Exposure of Roof ^a		
	Fully Exposed	Partially Exposed	Sheltered
B (see Section 26.7)	0.9	1.0	1.2
C (see Section 26.7)	0.9	1.0	1.1
D (see Section 26.7)	0.8	0.9	1.0
Above the treeline in windswept mountainous areas.	0.7	0.8	N/A
In Alaska, in areas where trees do not exist within a 2-mile (3-km) radius of the site.	0.7	0.8	N/A

c. Thermal Factor, $C_t = 1.2$

The value for C_t shall be determined from Table 7-

Table 7-3 Thermal Factor, C_t

Thermal Condition ^a	C_t
All structures except as indicated below	1.0
Structures kept just above freezing and others with cold, ventilated roofs in which the thermal resistance (R-value) between the ventilated space and the heated space exceeds $25^\circ\text{F} \times h \times \text{ft}^2/\text{Btu}$ ($4.4 \text{ K} \times \text{m}^2/\text{W}$).	1.1
Unheated and open air structures	1.2
Structures intentionally kept below freezing	1.3
Continuously heated greenhouses ^b with a roof having a thermal resistance (R-value) less than $2.0^\circ\text{F} \times h \times \text{ft}^2/\text{Btu}$ ($0.4 \text{ K} \times \text{m}^2/\text{W}$)	0.85

d. Importance Factor, $I_s = 1$

The value for I_s shall be determined from Table 1.5-2 based on the Risk Category from

Risk Category from Table 1.5-1	Snow Importance Factor, I_s	Ice Importance Factor—Thickness, I_s	Ice Importance Factor—Wind, I_s	Seismic Importance Factor, I_s
I	0.80	0.80	1.00	1.00
II	1.00	1.00	1.00	1.00
III	1.10	1.25	1.00	1.25
IV	1.20	1.25	1.00	1.50

^aThe minimum Importance Factor, I_s , applicable to windborne loads is not included in this table because it is dependent on the importance of

Than, The flat roof snow load, p_f , shall be calculated in lb/ft^2 (kN/m^2) using the following formul

$$P_f = 0.7 C_e C_t I_s P_g = 1088.64 \text{ N/m}^2 \quad (7.3-1)$$


(2) Sloped Roof Snow Loads, p_s

The sloped roof (balanced) snow load, p_s , shall be obtained by multiplying the flat roof snow load, p_f , by the roof slope fact

$$P_s = C_s P_f \quad (7.4-1)$$

$$C_s = 1.00$$

$$\text{Than, } P_s = C_s P_f = 1088.64 \text{ N/m}^2$$

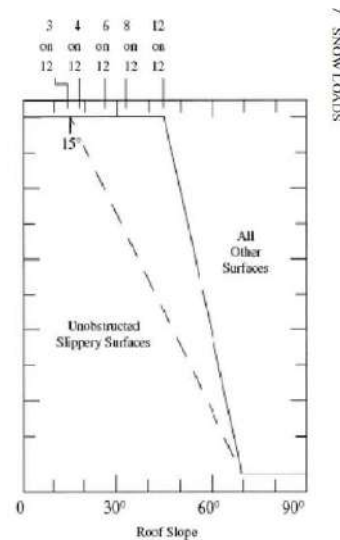

7-2c: Cold roofs with $C = 1.2$ or larger

2.2.3 Wind load

●Based Wind Speed 58.1 m/s

●Exposure category: B

●Installation angle= 5°

Design wind load for open buildings with monoslope, pitched, or troughed free module


$$P = qhGCN \quad (27.4-3)$$

Where:

qh = velocity pressure evaluated at mean roof height h using the exposure as defined in Section 26.7.3 that results in the highest wind loads for any wind direction at the site

$$G = 0.85 \quad (\text{gust-effect factor from Section 26.9})$$

CN = net pressure coefficient determined from Figs. 27.4-4 through 27.4-7

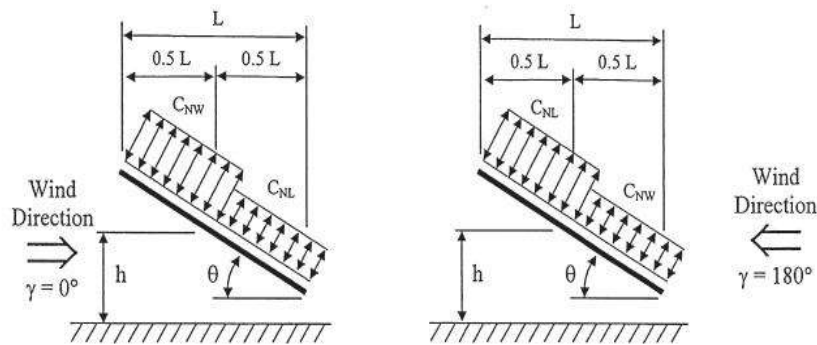

Roof Angle θ	Load Case	Wind Direction, $\gamma = 0^\circ$				Wind Direction, $\gamma = 180^\circ$			
		Clear Wind Flow		Obstructed Wind Flow		Clear Wind Flow		Obstructed Wind Flow	
		C_{NW}	C_{NL}	C_{NW}	C_{NL}	C_{NW}	C_{NL}	C_{NW}	C_{NL}
0°	A	1.2	0.3	-0.5	-1.2	1.2	0.3	-0.5	-1.2
	B	-1.1	-0.1	-1.1	-0.6	-1.1	-0.1	-1.1	-0.6
7.5°	A	-0.6	-1	-1	-1.5	0.9	1.5	-0.2	-1.2
	B	-1.4	0	-1.7	-0.8	1.6	0.3	0.8	-0.3
15°	A	-0.9	-1.3	-1.1	-1.5	1.3	1.6	0.4	-1.1
	B	-1.9	0	-2.1	-0.6	1.8	0.6	1.2	-0.3
22.5°	A	-1.5	-1.6	-1.5	-1.7	1.7	1.8	0.5	-1
	B	-2.4	-0.3	-2.3	-0.9	2.2	0.7	1.3	0
30°	A	-1.8	-1.8	-1.5	-1.8	2.1	2.1	0.6	-1
	B	-2.5	-0.5	-2.3	-1.1	2.6	1	1.6	0.1
37.5°	A	-1.8	-1.8	-1.5	-1.8	2.1	2.2	0.7	-0.9
	B	-2.4	-0.6	-2.2	-1.1	2.7	1.1	1.9	0.3
45°	A	-1.6	-1.8	-1.3	-1.8	2.2	2.5	0.8	-0.9
	B	-2.3	-0.7	-1.9	-1.2	2.6	1.4	2.1	0.4

Notes:

- C_{NW} and C_{NL} denote net pressures (contributions from top and bottom surfaces) for windward and leeward half of roof surfaces, respectively.
- Clear wind flow denotes relatively unobstructed wind flow with blockage less than or equal to 50%. Obstructed wind flow denotes objects below roof inhibiting wind flow (>50% blockage).
- For values of θ between 7.5° and 45° , linear interpolation is permitted. For values of θ less than 7.5° , use load coefficients for 0° .
- Plus and minus signs signify pressures acting towards and away from the top roof surface, respectively.
- All load cases shown for each roof angle shall be investigated.
- Notation:
 L : horizontal dimension of roof, measured in the along wind direction, ft. (m)
 h : mean roof height, ft. (m)
 γ : direction of wind, degrees
 θ : angle of plane of roof from horizontal, degrees

Then, CN (Net pressure coefficient)

Roof Angle	Load case	Wind Direction, $\gamma = 0^\circ$		Wind Direction, $\gamma = 180^\circ$	
		Clear Wind Flow		Clear Wind Flow	
		CNW	CNL	CNW	CNL
5	A	1.20	0.30	1.20	0.30
	B	-1.10	-0.10	-1.10	-0.10

Velocity pressure, q_z , evaluated at height z shall be calculated by the following equation:

$$q_z = 0.613 K_z K_{zt} K_d V^2 \quad (27.3-1)$$

Where:

K_d = wind directionality factor, see Section 26.6

K_z = velocity pressure exposure coefficient, see Section 27.3.1

K_{zt} = topographic factor defined, see Section 26.8.2

V = 58.1 m/s basic wind speed, see Section 26.5

a. Wind Directionality Factor, K_d

Structure Type	Directionality Factor K_d^*
Buildings Main Wind Force Resisting System Components and Cladding	0.85 0.85
Arched Roofs	0.85
Chimneys, Tanks, and Similar Structures Square Hexagonal Round	0.90 0.95 0.95
Solid Freestanding Walls and Solid Freestanding and Attached Signs	0.85
Open Signs and Lattice Framework	0.85
Trussed Towers Triangular, square, rectangular All other cross sections	0.85 0.95

*Directionality Factor K_d has been calibrated with combinations of loads specified in Chapter 2. This factor shall only be applied when used in conjunction with load combinations specified in Sections 2.3 and 2.4.

Than, $K_d = 0.85$

b. Topographic Factor

The wind speed-up effect shall be included in the calculation of design wind loads by using the factor K_{zt} :

$$K_{zt} = (1 + K_1 K_2 K_3)^2 \quad (26.8-1)$$

where K_1 , K_2 , and K_3 are given in Fig. 26.8-1.

If site conditions and locations of structures do not meet all the conditions specified in Section 26.8.1 then,

$$K_{zt} = 1$$

c. Velocity Pressure Exposure Coefficient

Based on the exposure category determined in Section 26.7.3, a velocity pressure exposure coefficient K_z or K_h , as applicable, shall be determined from Table 27.3-1. For a site located in a transition zone between exposure categories that is near to a change in ground surface roughness, intermediate values of K_z or K_h , between those shown in Table 27.3-1 are permitted provided that they are determined by a rational analysis method defined in the recognized literature.

Height above ground level, z		Exposure		
		B	C	D
ft	(m)			
0-15	(0-4.6)	0.57	0.85	1.03
20	(6.1)	0.62	0.90	1.08
25	(7.6)	0.66	0.94	1.12
30	(9.1)	0.70	0.98	1.16
40	(12.2)	0.76	1.04	1.22
50	(15.2)	0.81	1.09	1.27
60	(18)	0.85	1.13	1.31
70	(21.3)	0.89	1.17	1.34
80	(24.4)	0.93	1.21	1.38
90	(27.4)	0.96	1.24	1.40
100	(30.5)	0.99	1.26	1.43
120	(36.6)	1.04	1.31	1.48
140	(42.7)	1.09	1.36	1.52

Notes:

- The velocity pressure exposure coefficient K_z may be determined from the following formula:

$$\begin{array}{ll} \text{For } 15 \text{ ft.} \leq z \leq z_g & \text{For } z < 15 \text{ ft.} \\ K_z = 2.01 (z/z_g)^{2/\alpha} & K_z = 2.01 (15/z_g)^{2/\alpha} \end{array}$$


- α and z_g are tabulated in Table 26.9.1.
- Linear interpolation for intermediate values of height z is acceptable.
- Exposure categories are defined in Section 26.7.

Than, $K_z = 0.85$
 So, $q_z = 0.613 K_z K_{zt} K_d V^2 = 1495.03 \text{ N/m}^2$


NET DESIGN PRESSURE (p)
 $P = qh \cdot G \cdot C_N$

Roof Angle	Load case	Wind Direction, $\gamma = 0^\circ$		Wind Direction, $\gamma = 180^\circ$	
		Clear Wind Flow		Clear Wind Flow	
		PNW	PNL	PNW	PNL
5	A	1.73	0.43	1.73	0.43
	B	-1.59	-0.14	-1.59	-0.14

CASE A

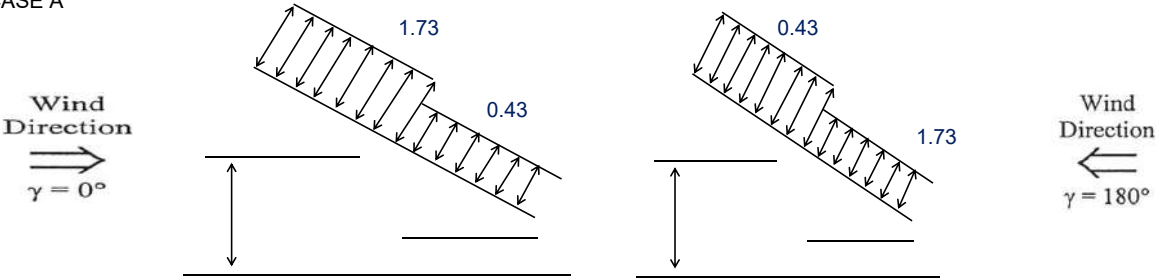

CASE B

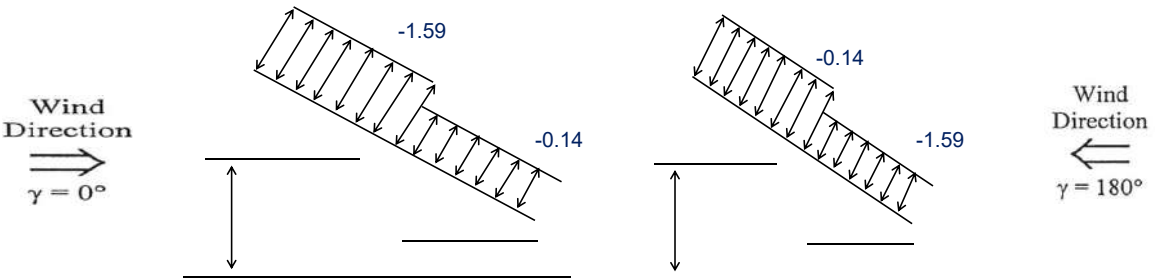

2.2.4 Load combination

Load and Resistance Factor Design (LRFD)

1.4D
 1.2D+1.6S+0.5W
 1.2D+1.0W+0.5S
 0.9D+1.0W

G: Dead load
 S: Snow load
 W: Wind load

2.3 Strength Calculation


Dead load $G = 0.12 \text{ N/mm}$
 Wind load $W =$

Roof Angle	Load case	Wind Direction, $\gamma = 0^\circ$		Wind Direction, $\gamma = 180^\circ$	
		Clear Wind Flow		Clear Wind Flow	
		PNW	PNL	PNW	PNL
5	A	1.73	0.43	1.73	0.43
	B	-1.59	-0.14	-1.59	-0.14

Snow load $S = 1.23 \text{ N/mm}$

2.3.1 Load diagram:


Dead load D:

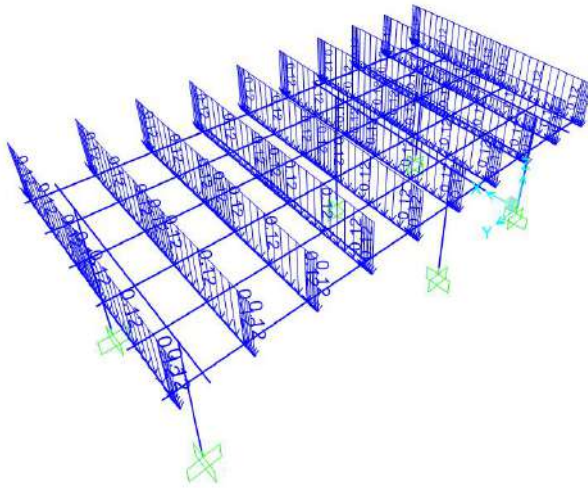


Wind load W:

CASE A

w+

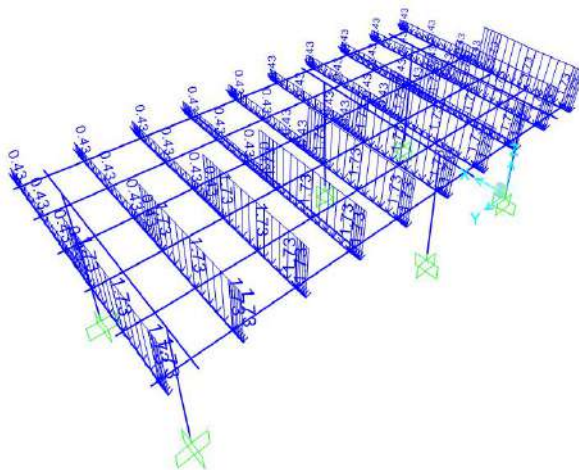


w-

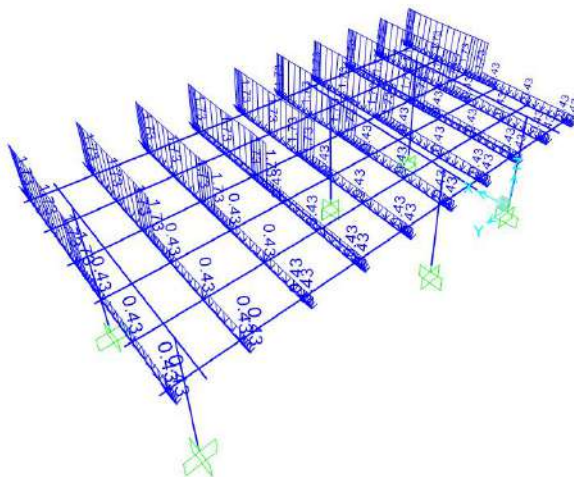


CASE B


w+

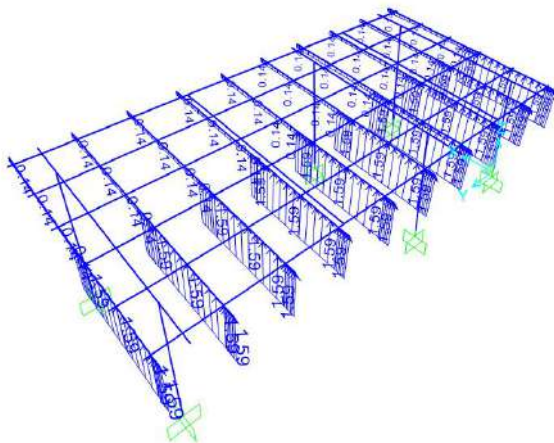

w-

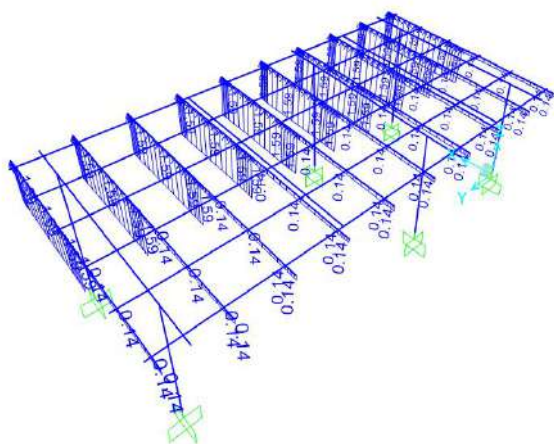


Snow load S:

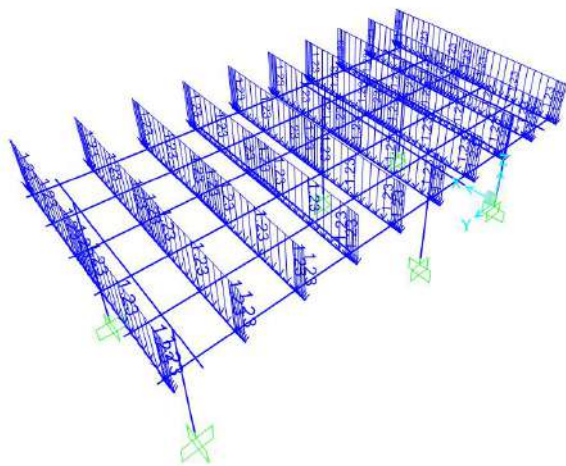

2.3.2 Structural calculation

a.Design utility ratio

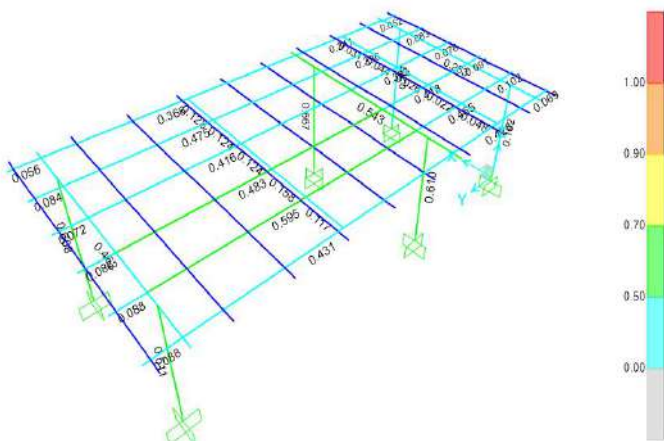


Items	ratio
Mount rail	0.595
Welded beam	0.543
Welded pile	0.668
Steel rod	0.158

Item	BIPV rail
Axial P ,N	93.730
Moment M2,N*mm	112301.040
Moment M3,N*mm	267025.080
P σp= F/A,Mpa	0.208
M2 σy=My/WyB,Mpa	15.237
M3 σz=Mx/WxB,Mpa	62.598
[σ],Mpa	240
Ratio	0.325
	ok

Note: ratio = Actual stress/Allowable stress

-----Failed ratio>1.0 ----- Passed ratio<1.0


b.Deflection ratio

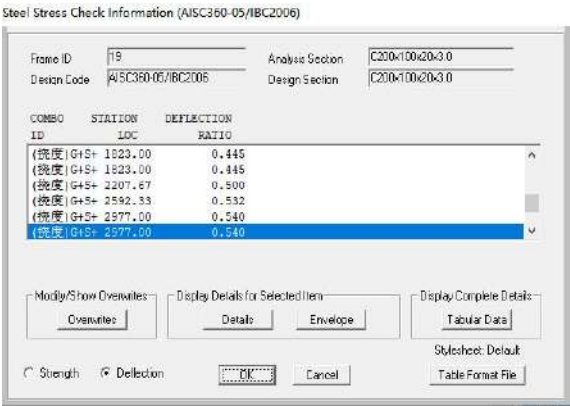

Note: -----Failed ratio>1.0 ----- Passed ratio<1.0


c.Reaction force of foundation

Positive Force

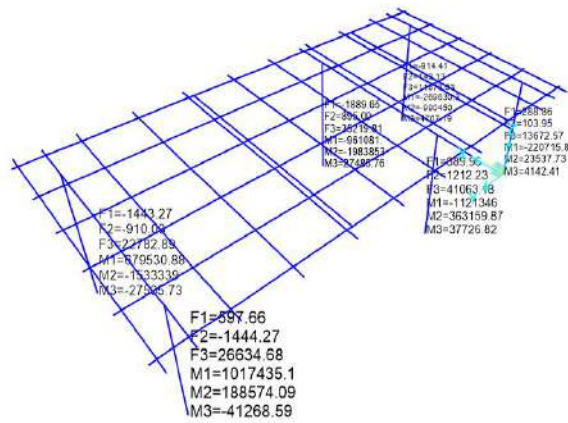

Maximum vertical force FV1= 35219.81 N/1 base
Maximum horizontal force FH1= 1889.65 N/1 base

Negative Force

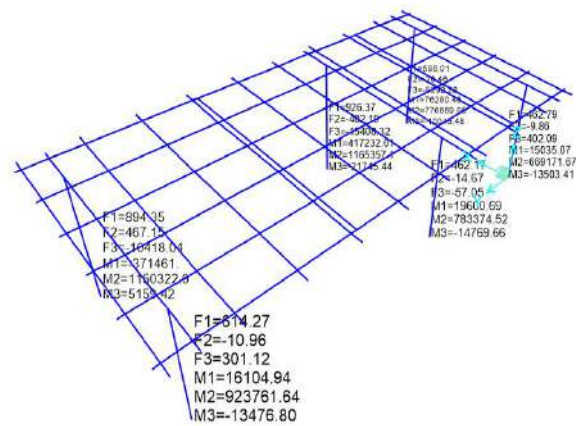

Maximum vertical force FV1= 15408.32 N/1 base
Maximum horizontal force FH1= 926.37 N/1 base